


Electric height adjustable desk

Assembly instructions


2-leg standing desk

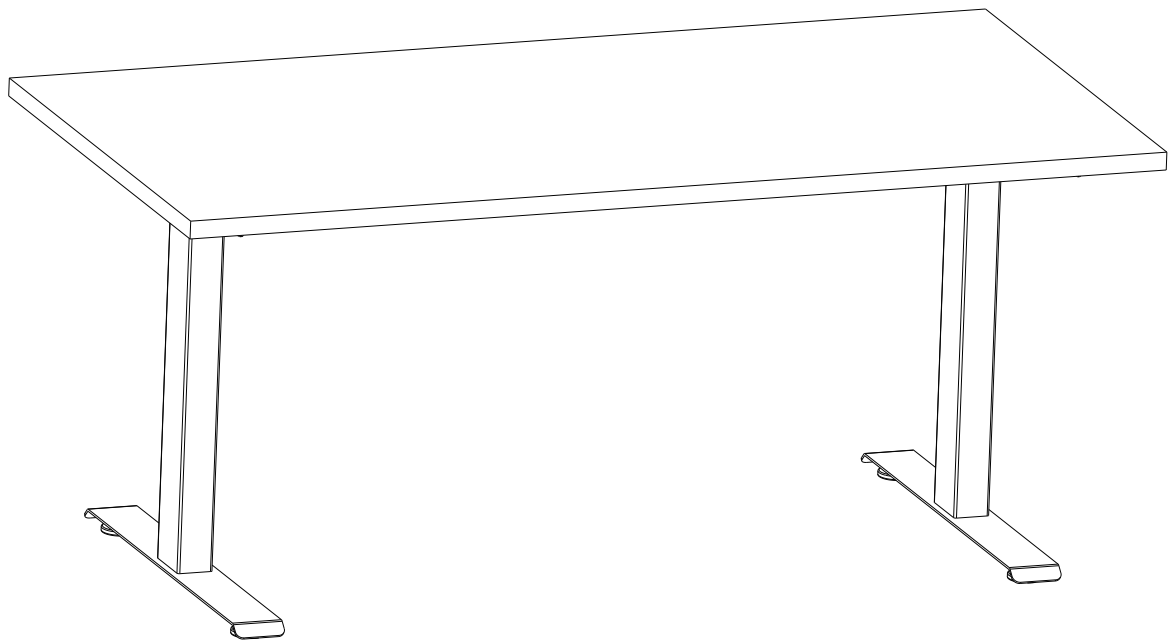






NOTICE!

If you're building a desk with 3 legs, please follow the instructions that are included in the 3rd Leg Box.

PACKAGE CONTENTS





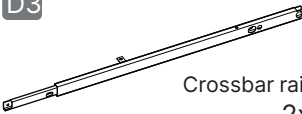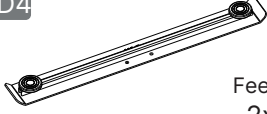











DESK COMPONENTS

D1  Leg 2x	D2  Side bracket 2x	D3  Crossbar rail 2x	D4  Feet 2x
D5*  Extension bar* 2x			


* Extension bars are included only with table tops of 2400mm length.

HARDWARE

H1  M6x12 8x	H2  M6x10 4x	H3  Screw clamp 2x	H4  Screw guide bush 2x	H5  M6x14 8x	H6  2mm rubber 4x	H7  5mm rubber 2x
H8  Tapping screw 5x20 12x	H9  Tapping screw 5x16 2x	H10  Control box 1x	H11  Handset* 1x	H12  Power cable 1x	H13  Leg cable 1x	T1  Hex key 1x


Note: There may be additional hardware included in the package, as these are used for different desk configurations.


D2

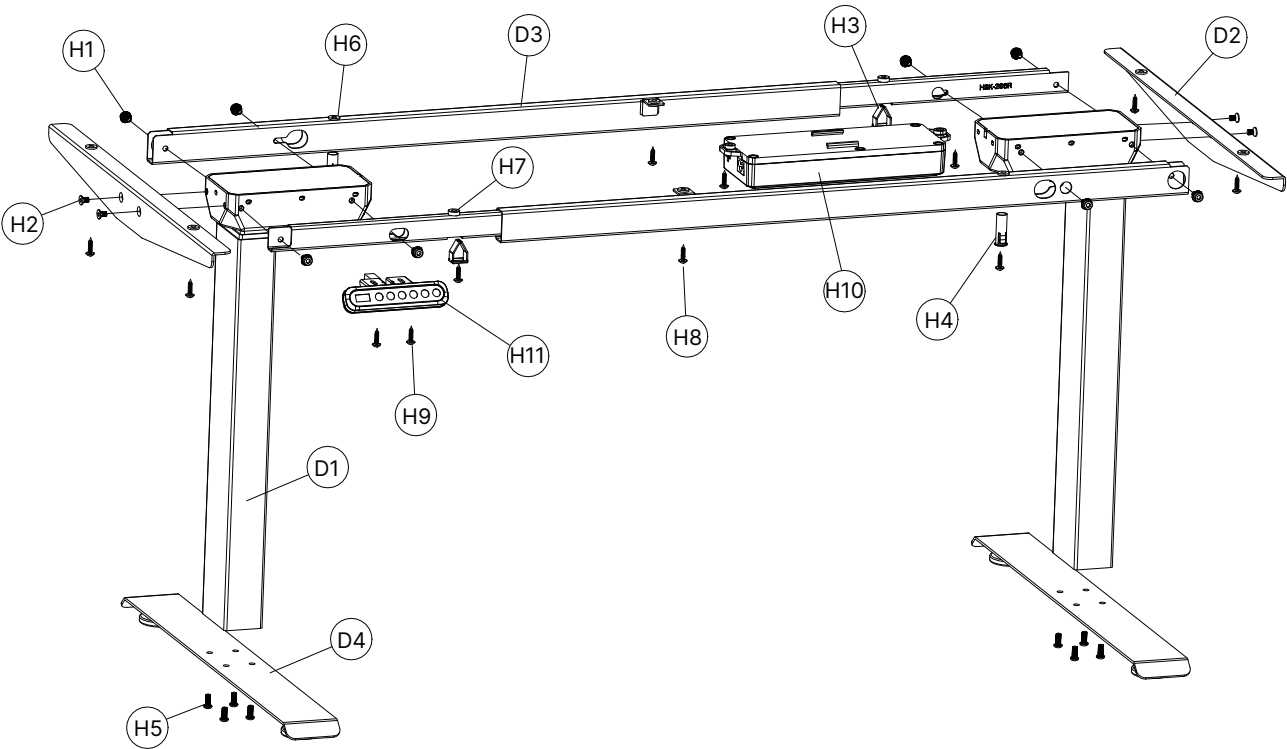




ASSEMBLY INSTRUCTIONS

1



H3	H4	H6	H7
			
Screw clamp 2x	Screw guide bush 2x	2mm rubber 4x	5mm rubber 2x

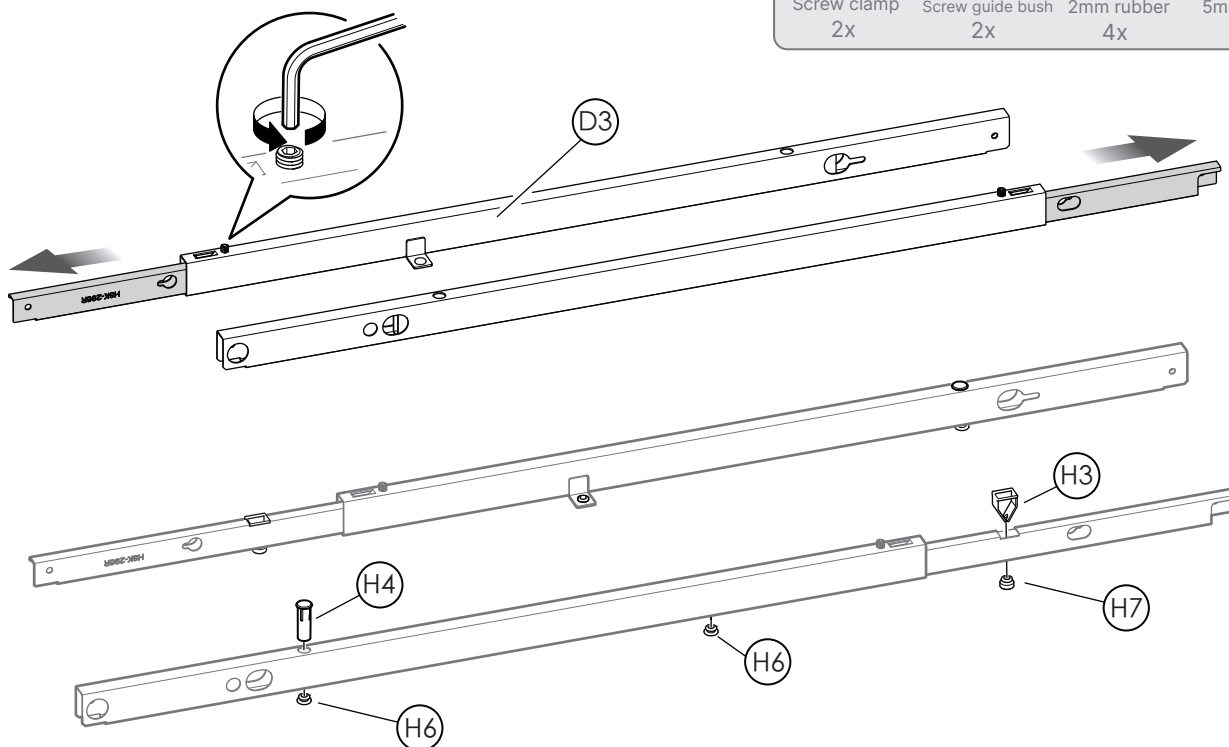

2

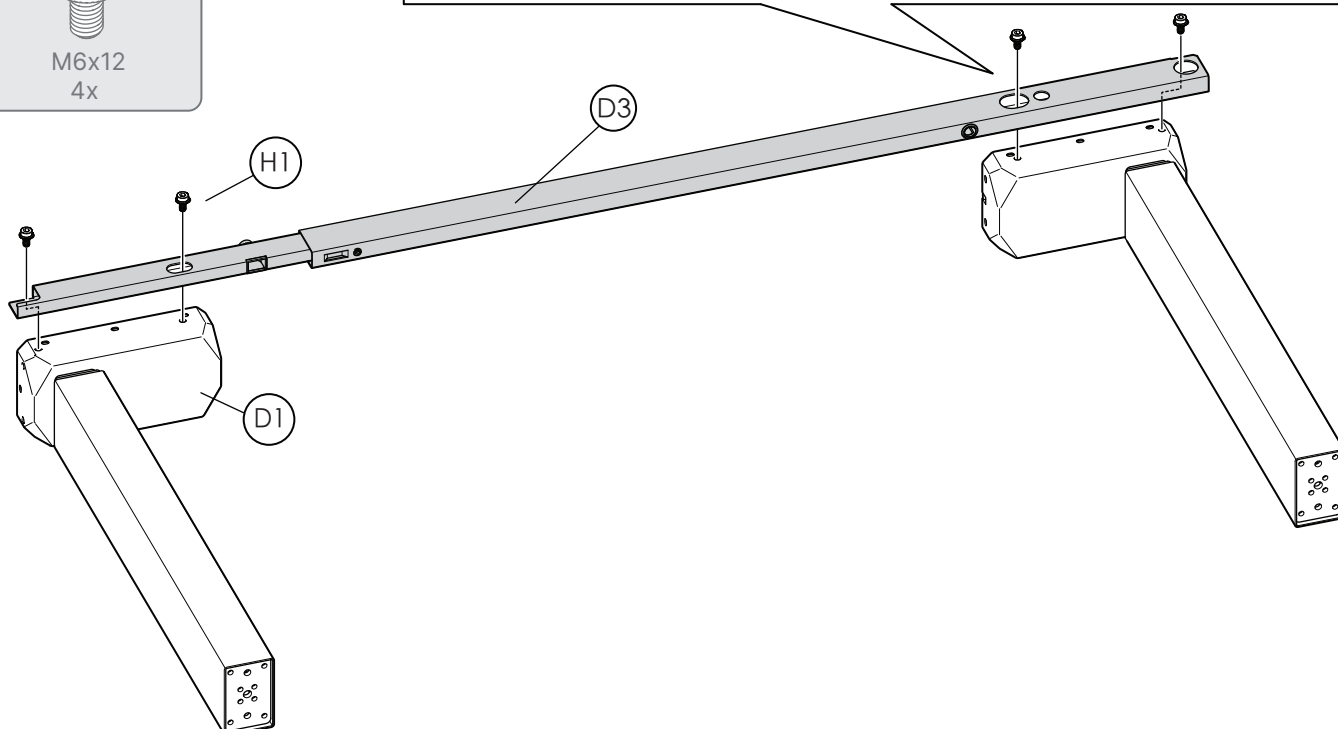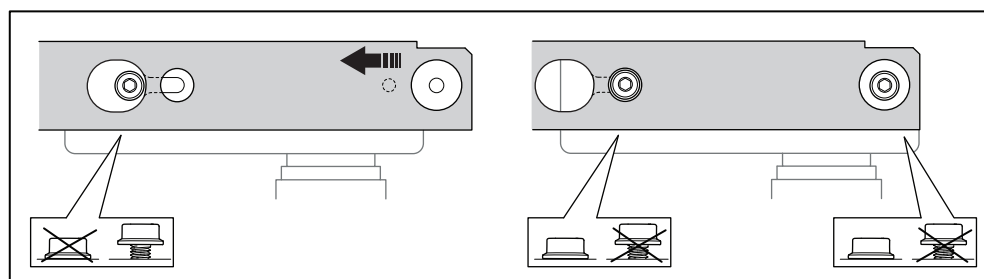


3

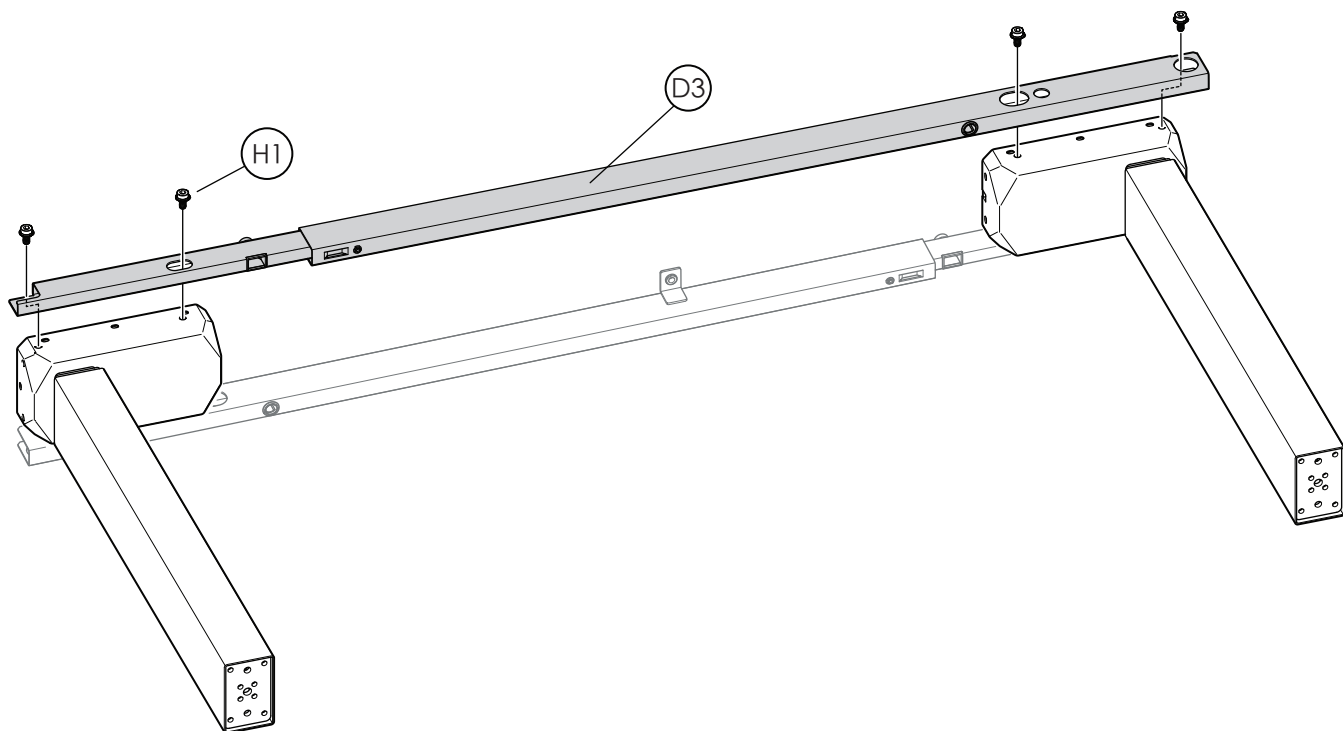

4a


Rectangular shape table top

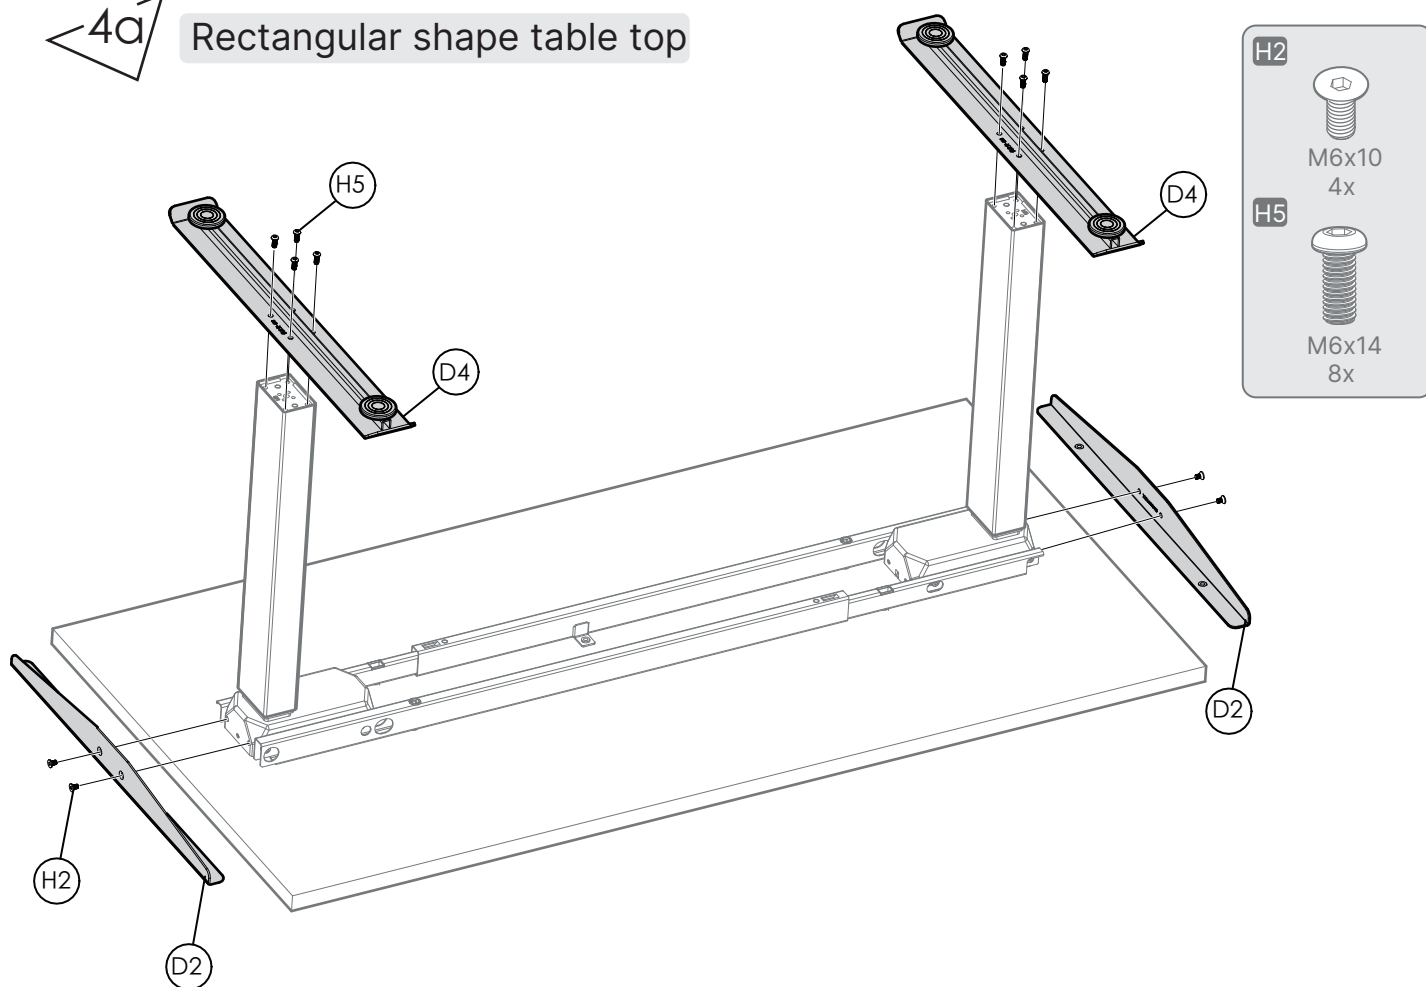


4b

Wave shape table top




! Use the longer feet and side bracket that is included in your package for the deepest side of the table top.

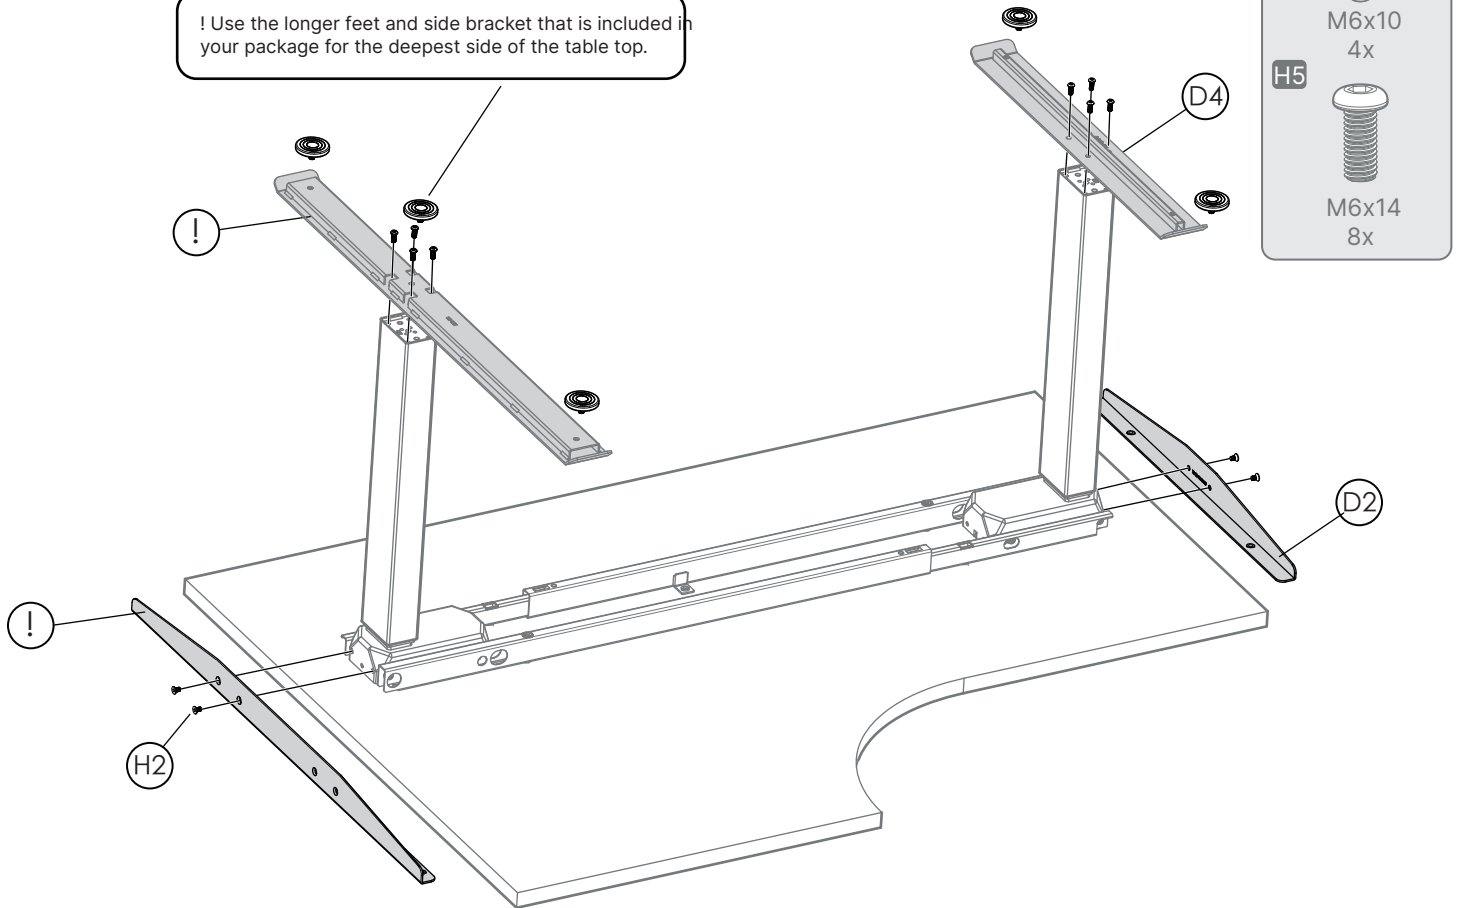






5

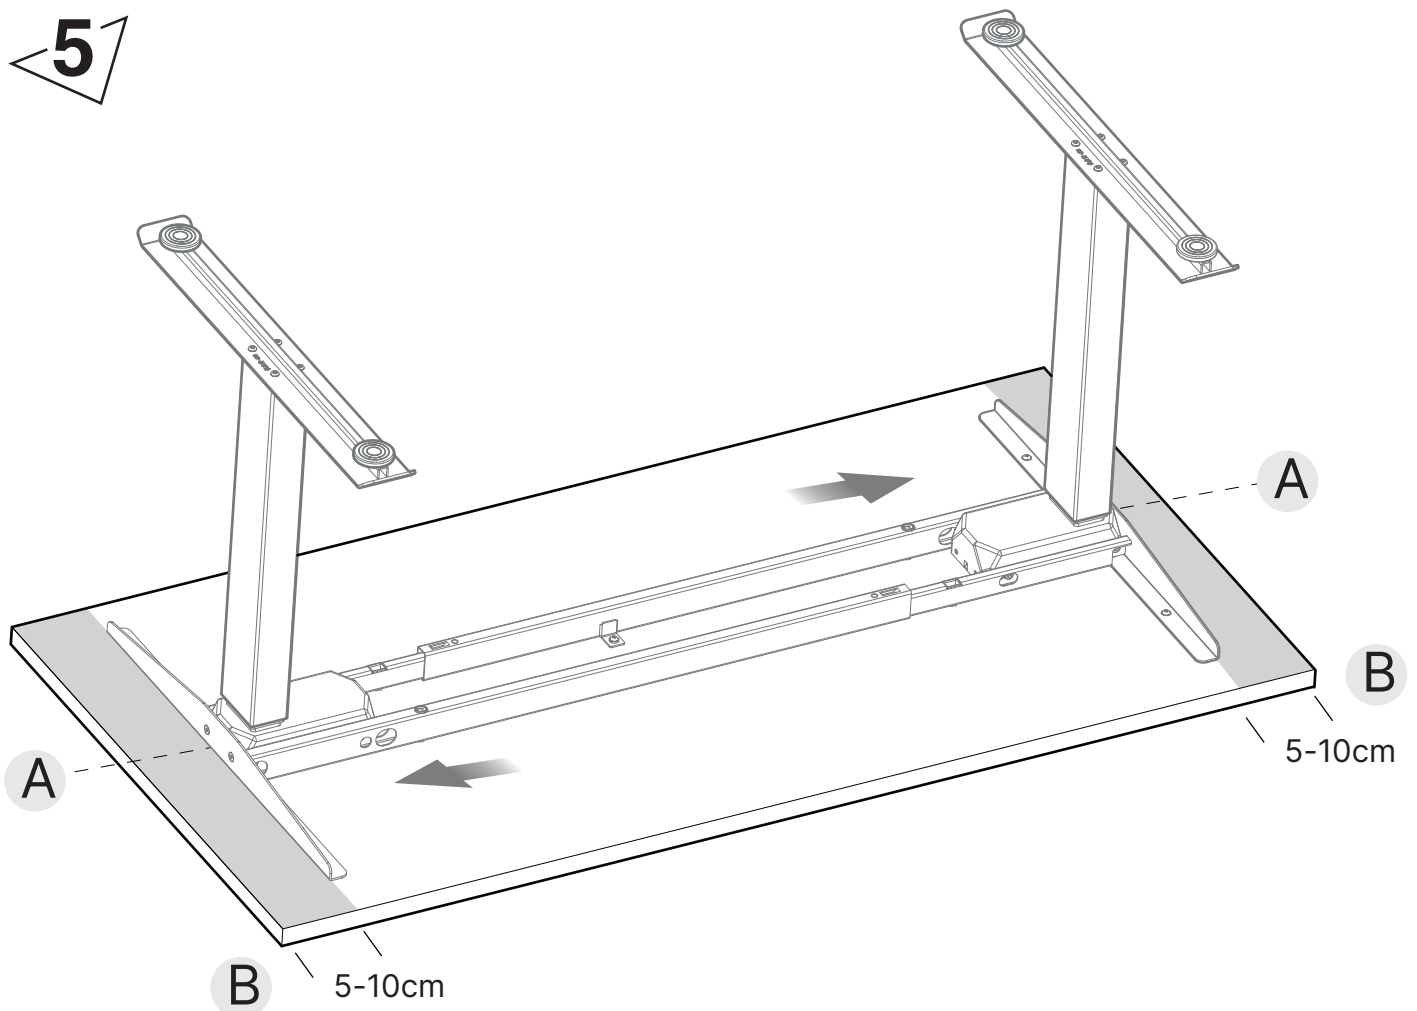

6

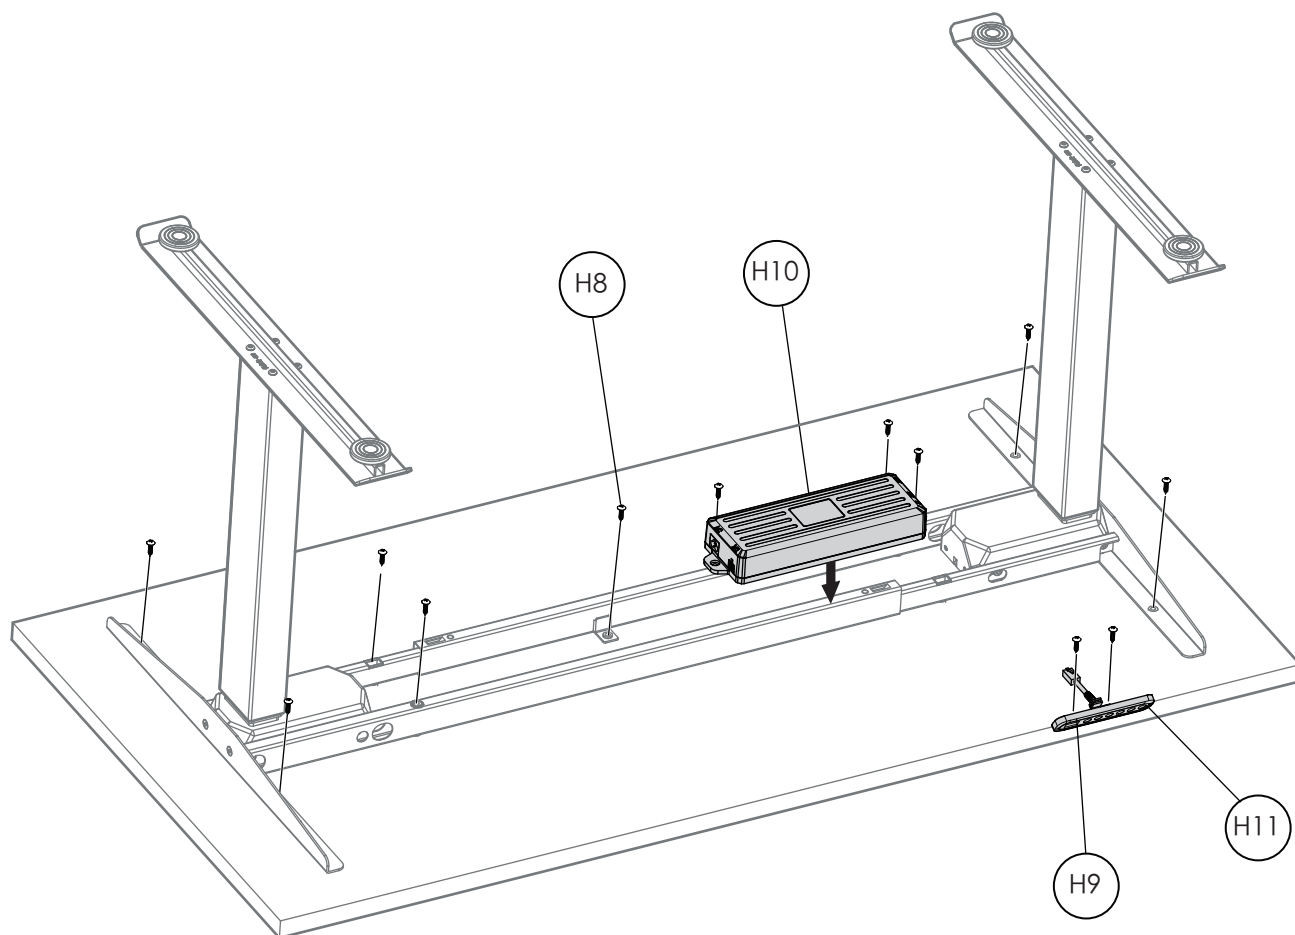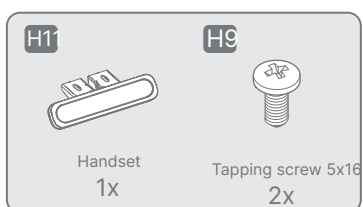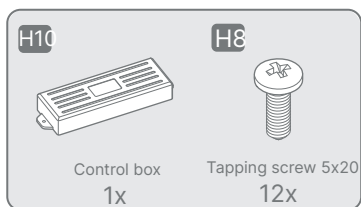

7

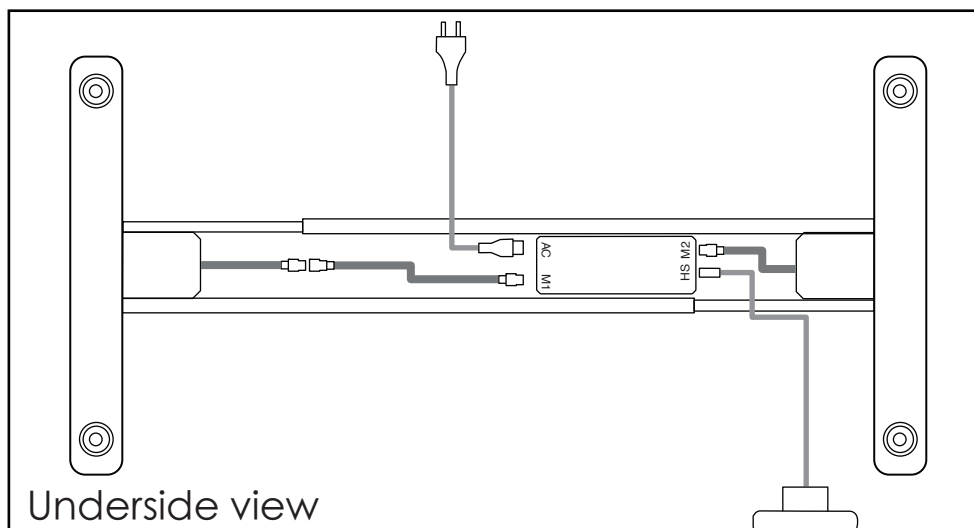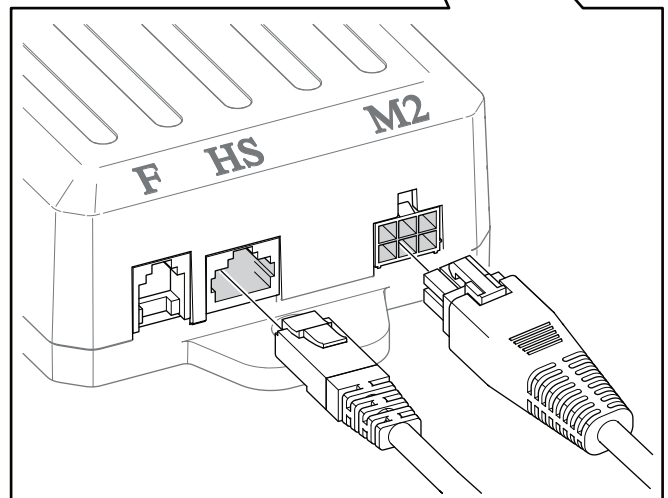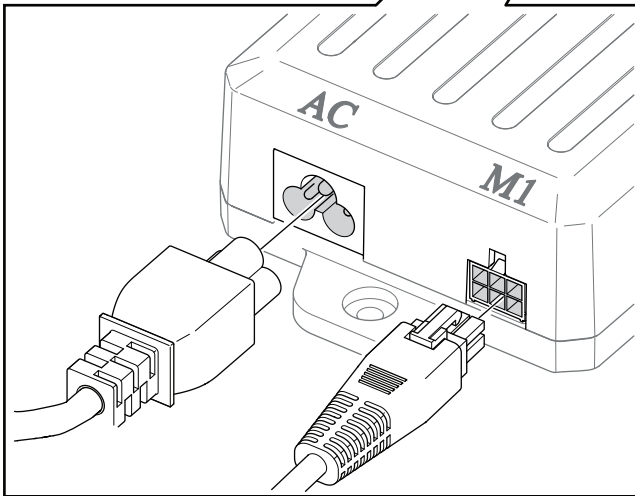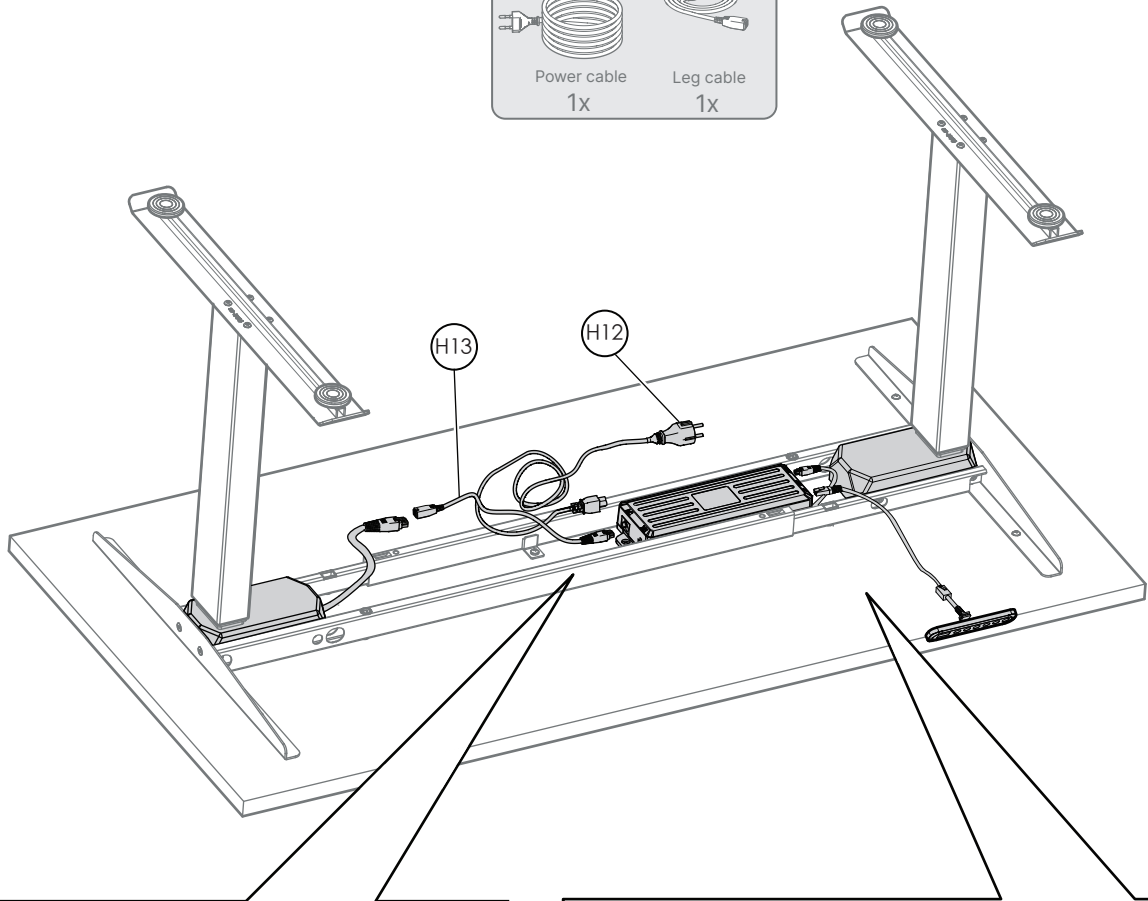

Assembly instructions – 2 leg desk

English

Step 1

The crossbar rails (D3) are compressed when delivered.

1. Loosen the set screws slightly and extend the inner rail.
2. Attach rubber bushing (H6) and plastic screw guide bushing (H4) on the thicker part of the crossbar rail.
3. Install rubber bushing (H7) and triangular screw clamp (H3) on the thinner side of the crossbar rail.

Step 2

1. Take the legs (D1) and lay them on a flat surface.
2. Place a crossbar rail (D3) across the legs, ensuring the rubber bushings face upwards towards the table top.
3. Attach the crossbar to the leg with four M6x12 screws (H1).

Step 3

1. Flip the assembly and place the second crossbar (D3), install with four M6x12 screws (H1).

Step 4

1. Install the side brackets (D2), each with two M6x10 screws (H2). Pay attention to the orientation of the side brackets.
2. Install the two feet by using four M8x14 screws (H5).

Note! If you have a L-shaped desk, use the longer feet and side bracket on the deepest end of the table top.

Step 5

1. Adjust the width of the frame assembly by moving the legs closer together or farther apart.
2. Place the columns in the middle of the table top, as illustrated in A.
3. Make sure there is a 5-10cm gap between the frame and the edge of the table top, as shown in illustration B.

Step 6

1. Secure the tabletop to the frame, using the included tapping screws 5x20mm (H8).
2. Use two tapping screws 5x20mm (H8) to fix the control box (H10), and two 5x16 screws (H9) for the handset (H11).

Step 7

1. Connect the handset (H11) into the control box (H10) in port labeled "HS".
2. Connect the leg cable which is nearest to the control box in port labeled "L1".
3. Connect the second leg with the included leg cable (H12) and then into port labeled "L2" on the control box.
4. Plug the power cable (H12) into port labeled "AC" on the control box. Plug your desk into a electrical outlet.

Note! Before using your desk, a desk reset is required. See chapter 1 in your user manual for the handset.